ARMOUR

徐州徐工轮胎有限公司
XUZHOU XUGONG TYRES CO.,LTD.

地　址：江苏省徐州市徐州工业园区徐轮路1号
邮　编：221011
电　话：0516-83736322/83712224
传　真：0516-83737827
网　址：www.xlxj.cn
EMAIL：armourtyre@163.com

ADD:NO. 1 XULUN ROAD, INDUSTRIAL PARK OF XUZHOU,
JIANGSU, 211011, CHINA.
POST CODE:221011
TEL:86-516-83736322/83712224
FAX:86-516-83737827
WEBSITE:www.xlxj.cn
EMAIL:armourtyre@163.com

徐州徐工轮胎有限公司
XUZHOU XUGONG TYRES CO.,LTD.

ARMOUR®

目录
CONTENTS

02 企业简述 COMPANY OVERVIEW
03 企业荣誉 ENTERPRISE HONOR
05 企业品牌 ENTERPRISE BRAND
07 工程轮胎 OFF-THE-ROAD TIRE
13 工业轮胎 INDUSTRIAL TIRE
21 农业轮胎 AGRICULTURAL TIRE
31 实心轮胎 SOLID TYRE
33 载重轮胎 TRUCK TIRE

COMPANY OVERVIEW
企业简述

徐州徐工轮胎有限公司(原江苏轮胎厂)隶属于徐工集团，始建于1951年，为国家大型一类企业，是国家定点生产轮胎产品的重点企业。公司综合生产能力为轮胎320万套，其中工程轮胎60万套。年销售收入20亿元，其中自营出口8000万美元。产品已形成工程机械轮胎、农业轮胎、工业轮胎、载重轮胎、轻型载重轮胎、实心胎6大系列400多个产品规格。主要产品均为国家A、B级和省、部优产品，与国内名牌汽车、拖拉机、工程机械厂家配套。产品在国内畅销20多个省、市、自治区，国际市场远销欧洲、中东、北美、东南亚、澳洲、非洲等国家和地区。公司现有员工3000人，其中工程技术人员410人。公司下属5个生产厂、17个处室，并设有橡胶科学研究所、中心试验室、江苏省橡胶制品质量检测站，形成集生产、科研、检测于一体的企业群体。企业通过ISO9001:2000标准质量体系认证，产品通过美国质量DOT，欧盟ECE认证和中国强制性产品CCC认证。"甲"牌系列产品连续10年被江苏省名牌产品认定委员会认定为"江苏名牌产品"，多年来，公司先后被国家、省、市命名为国家二级计量合格单位，省级先进企业，徐州市重合同守信用单位，中国百强橡胶制品企业，江苏省工业百强企业，全国行业五十家最佳经济效益工业企业。

Xuzhou Xugong Tyres Co. Ltd (formerly Jiangsu Tyres Plant) was established in 1951, which has been designated by the former Ministry of Chemical Industry as the major tyres manufacturer in China. The annual sales is 2 billion yuan and export reaches 80 million U.S. Dollars. The annual manufacturing output is 3.2 million sets of bias tyres including Off-The-Road (OTR) tyres, Agriculture tyres, Industrial tyres, Solid tyres, Truck and light truck tyres, which form over four hundred sizes. As a large-scale enterprise, the company has more than 3,000 employees, including 410 technicists, and owns five production branch-plants, one rubber science research department, one central laboratory and one training center. Xugong has been qualified with ISO9001:2000, and was granted the certificate of DOT, ECE, and China Compulsory Certificate(3C). The products has become one of the leading poroducts in domestic market as well as in the United States, Western Europe, Australia, and South Africa etc.

ENTERPRISE HONOR
企业荣誉

企业通过ISO9001:2000标准质量体系认证，产品通过美国质量DOT，欧盟ECE认证和中国强制性产品CCC认证。"甲"牌系列产品连续10年被江苏省名牌产品认定委员会认定为"江苏名牌产品"，多年来，公司先后被国家、省、市命名为国家二级计量合格单位，省级先进企业，徐州市重合同守信用单位，中国百强橡胶制品企业，江苏省工业百强企业，全国行业五十家最佳经济效益工业企业。

Xugong has been qualified with ISO9001:2000, and was granted the certificate of DOT, ECE, and China Compulsory Certificate(3C). The products has become one of the leading poroducts in domestic market as well as in the United States, Western Europe, Australia, and South Africa etc.

ENTERPRISE BRAND
企业品牌

ARMOUR

DOT　ECE　中国强制性CCC认证

徐工　ARMOUR 甲宇　丰收　海鹏

OFF-THE-ROAD TYRE
工程轮胎

工程轮胎 OFF-THE-ROAD TYRE

C-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.50-15 TT	12PR	C-1	6.00	-	785	215	750	2650
7.50-15 TT	6PR	C-1	6.00	-	785	215	400	1850
8.5/90-15 TL	6PR	C-1	6.00	-	785	215	345	1770
9.00-20 TT	12PR	C-1	7.0	-	1015	255	625	4000
11.00-20 TT	16PR	C-1	8.0	-	1080	290	725	5450

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
20.5-25 TT	16PR	C-2	17.00/2.0	16	1490	520	350	8250
23.1-26 TL	12PR	C-2	DW20	16	1500	595	170	3655
23.1-26 TT	12PR	C-2	DW20	16	1500	595	170	3655

C-2

L-2

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
13.00-24 TL	16PR	L-2	9.00DC	23.5	1300	350	400	3200
13.00-24 TL	12PR	L-2	9.00DC	23.5	1300	350	300	3000
14.00-24 TL	18PR	L-2	9.00DC	25	1370	375	400	3550
14.00-24 TL	16PR	L-2	9.00DC	25	1370	375	375	4000
14.00-24 TL	12PR	L-2	9.00DC	25	1370	375	275	3350
15.5-25 TL	12PR	L-2	12.00/1.3	23.5	1275	395	225	2650
17.5-25 TL	12PR	L-2	14.00/1.5	26	1350	445	200	2900
17.5-25 TL	16PR	L-2	14.00/1.5	26	1350	445	275	3350
20.5-25 TL	16PR	L-2	17.00/2.0	29.5	1490	520	225	4000
23.5-25 TT	16PR	L-2	19.00/2.5	31.5	1615	595	200	4750
23.5-25 TL	16PR	L-2	19.00/2.5	31.5	1615	595	200	4750

工程轮胎 OFF-THE-ROAD TYRE

L-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	10Km/h 标准气压 RELEVANT PRESSURE KPA	10Km/h 单胎负荷 MAX LOADING KG	50Km/h 标准气压 RELEVANT PRESSURE KPA	50Km/h 单胎负荷 MAX LOADING KG
16/70-20 TT	14PR	L-3	13	23	1075	410	450	5150	350	2900
16/70-20 TL	14PR	L-3	13	23	1075	410	450	5150	350	2900
16/70-24 TT	14PR	L-3	13	23	1175	410	450	5600	350	3350
17.5-25 TT	12PR	L-3	14.00/1.5	26	1350	445	350	6150	225	3650
17.5-25 TT	16PR	L-3	14.00/1.5	26	1350	445	475	7300	300	4250
20.5-25 TT	16PR	L-3	17.00/2.0	30	1490	520	350	8250	275	5450
23.5-25 TT	16PR	L-3	19.00/2.5	33	1615	595	300	9500	225	6150
23.5-25 TT	18PR	L-3	19.00/2.5	33	1615	595	335	10100	255	6700
23.5-25 TT	20PR	L-3	19.00/2.5	33	1615	595	375	10900	300	7300
23.5-25 TT	24PR	L-3	19.00/2.5	33	1615	595	475	12500	350	8000

L-4

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
17.5-25 TL	16PR	L-4	14.00/1.5	46	1400	445	475	7300

L-5

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
17.5-25 TL	16PR	L-5	14.00/1.5	63.5	1400	445	475	7300
20.5-25 TL	20PR	L-5	14.00/1.5	71.5	1550	520	450	9500
23.5-25 TL	20PR	L-5	17.00/2.0	78.5	1675	595	375	10900
26.5-25 TL	28PR	L-5	22.00/3.0	87.5	1800	675	475	15500
29.5-25 TL	28PR	L-5	25.00/3.5	95	1920	750	425	17500
29.5-25 TL	32PR	L-5	25.00/3.5	95	1920	750	500	19500

KL-5

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
20.5-25 TL	20PR	KL-5	14.00/1.5	71.5	1550	520	450	9500
23.5-25 TL	20PR	KL-5	17.00/2.0	78.5	1675	595	375	10900
23.5-25 TL	24PR	KL-5	17.00/2.0	78.5	1675	595	475	12500

L-4S

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
18.00-25 TL	32PR	L-4S	13.00/2.5	48	1675	500	750	15000

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
12.00-20 TT	24PR	L5S	8.5	50	1173	315	900	6300
12.00-24 TT	24PR	L5S	8.5	50	1275	315	850	6800
14.00-24 TT	24PR	L5S	10.0	65	1420	375	850	9500
16.00-25 TL	40PR	L5S	11.25/2.0	68	1550	430	1075	14500
16.00-25 TL	32PR	L5S	11.25/2.0	68	1550	430	875	12500
17.5-25 TL	24PR	L5S	14.00/1.5	69	1400	445	675	9000
18.00-25 TL	40PR	L5S	13.00/2.5	75	1675	500	950	17000
26.5-25 TL	32PR	L5S	22.00/3.0	87.5	1800	675	550	17000
26.5-25 TL	28PR	L5S	22.00/3.0	87.5	1800	675	475	15500

L-5S

EV4

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
23.5-25 TL	20PR	EV4	19.50/2.5	44	1615	595	375	10900

工程轮胎 OFF-THE-ROAD TYRE

E-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	10Km/h 标准气压 RELEVANT PRESSURE KPA	10Km/h 单胎负荷 MAX LOADING KG	50Km/h 标准气压 RELEVANT PRESSURE KPA	50Km/h 单胎负荷 MAX LOADING KG
15.5-25 TL	12PR	E3	12.00/1.3	23.5	1275	395	400	5600	250	3250
15.5-25 TL	16PR	E3	12.00/1.3	23.5	1275	395	475	6150	325	3750
17.5-25 TL	12PR	E3	14.00/1.5	26	1350	445	350	6150	225	3650
17.5-25 TL	16PR	E3	14.00/1.5	26	1350	445	475	7300	300	4250
20.5-25 TL	16PR	E3	17.00/2.0	29	1490	520	350	8250	275	5450
20.5-25 TL	20PR	E3	17.00/2.0	29	1490	520	450	9500	325	6000
23.5-25 TL	16PR	E3	19.00/2.5	30	1615	595	300	9500	225	6150
23.5-25 TL	20PR	E3	19.00/2.5	30	1615	595	375	10900	300	7300
26.5-25 TL	28PR	E3	22.00/3.0	35	1750	675	475	15500	350	10000
29.5-25 TL	28PR	E3	25.00/3.5	38	1875	750	425	17500	325	11500
29.5-25 TL	32PR	E3	25.00/3.5	38	1875	750	500	19500	400	12800
29.5-29 TL	28PR	E3	25.00/3.5	38	1975	750	425	19000	325	12150

R-6

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
18.00-24 TT	12PR	R-6	13.00/2.5	25	1615	500	275	8250

R-5

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
16/70-20 TT	14PR	R-5	13.00	25	1075	410	450	5150

TI200

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	TI200	8.25	30	773	264	380	1750
10-16.5 TL	10PR	TI200	8.25	30	773	264	450	1950
12-16.5 TL	12PR	TI200	9.75	30	831	307	520	2780
10.5/80-18 TL	10PR	TI200	9.0	30	905	274	370	1935
12.5/80-18 TL	12PR	TI200	9.0	30	985	308	370	2625
16.9-24 TL	14PR	TI200	DW15	48	1310	430	300	3530
19.5L-24 TL	12PR	TI200	DW16	51	1315	495	230	3450
21L-24 TL	14PR	TI200	DW18L	53	1375	533	250	4200
16.9-28 TL	14PR	TI200	DW15	48	1435	430	300	3765
16.9-30 TL	14PR	TI200	DW15	48	1485	430	290	3705

TG-2

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
14.00-24 TL	16PR	TG-2	10.0	25	1348	362	350	3650

G-6

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
13.00-25 TT	28PR	G-6	10.00/1.5	24.5	1300	350	740	5570

T17

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
14.00-20 TT	24PR	T17	10.0	25	1265	375	870	5625

E-4B / E-4B PA

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
18.00-25 TL	40PR	E-4B	13.00/2.5	54	1675	500	950	17000

E-4D / E-4D PA

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
18.00-33 TL	36PR	E-4D	13.00/2.5	71	1875	500	850	18500

INDUSTRIAL TYRE
工业轮胎

工业轮胎 INDUSTRIAL TYRE

EM500

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	EM500	8.25	14	773	264	380	1750
10-16.5 TL	10PR	EM500	8.25	14	773	264	450	1950
12-16.5 TL	10PR	EM500	9.75	19	831	307	450	2540
23*8.5-12 TL	6PR	EM500	7.00	13	574	213	350	775
27*8.5-15 TL	6PR	EM500	7.00	15	678	213	350	1030

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	RG400	8.25	18	773	264	380	1750
10-16.5 TL	10PR	RG400	8.25	18	773	264	450	1950
10-16.5 TL	12PR	RG400	8.25	18	773	264	520	2130
12-16.5 TL	10PR	RG400	9.75	18	831	307	450	2540
12-16.5 TL	12PR	RG400	9.75	18	831	307	520	2780

RG400

RG500

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	RG500	8.25	19	773	264	380	1750
10-16.5 TL	10PR	RG500	8.25	19	773	264	450	1950
12-16.5 TL	10PR	RG500	9.75	19	831	307	450	2540
12-16.5 TL	12PR	RG500	9.75	19	831	307	520	2780
14-17.5 TL BIG DOG	14PR	RG500	10.5	22	921	349	560	3875
14-17.5 TL NHS	14PR	RG500	10.5	24	921	349	560	3875
15-19.5 TL BIG DOG	14PR	RG500	11.75	22	1019	389	560	5070
15-19.5 TL NHS	14PR	RG500	11.75	24	1019	389	560	5070

工业轮胎 INDUSTRIAL TYRE

RG600

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	12PR	RG600	8.25	26	773	264	520	2130
12-16.5 TL	14PR	RG600	9.75	32	831	307	560	2880

SK300

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	SK300	8.25	15	773	264	380	1750
10-16.5 TL	10PR	SK300	8.25	15	773	264	450	1950
12-16.5 TL	8PR	SK300	9.75	18	831	307	380	2320
12-16.5 TL	10PR	SK300	9.75	18	831	307	450	2540
27*10.5-15	8PR	SK300	9.75	15	691	259	410	1180

SK400

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.70-12 TL	6PR	SK400	4.05	14	647	146	420	660
23*8.5-12 TL	6PR	SK400	7.0	12	574	213	350	775
27*10.5-15 TL	6PR	SK400	8LB	12.5	691	259	350	1090
27*10.5-15 TL	8PR	SK400	8LB	12.5	691	259	410	1180
27*8.5-15 TL	6PR	SK400	7JA	12	678	213	350	1030
27*8.5-15 TL	8PR	SK400	7JA	12	678	213	410	1110

SK800

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	SK800	8.25	16	773	264	380	1750
10-16.5 TL	10PR	SK800	8.25	16	773	264	450	1950
12-16.5 TL	10PR	SK800	9.75	17	831	307	450	2540

SK900

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	8PR	SK900	8.25	16	759	279	380	1750
10-16.5 TL	10PR	SK900	8.25	16	759	279	450	1950
12-16.5 TL	10PR	SK900	9.75	17	831	307	450	2540
14-17.5 TL	14PR	SK900	10.5	22	921	349	520	3875
15-19.5 TL	14PR	SK900	11.75	22	1019	389	690	5600

L-4A

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10-16.5 TL	12PR	L4A	8.25	27	773	264	600	2375
12-16.5 TL	14PR	L4A	9.75	33	831	307	560	2880

TI300

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
9.00-20 TT	14PR	TI300	7.0	20	1018	259	760	4385
10.00-20 TT	16PR	TI300	7.5	20	1055	278	690	4695

TI400

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
8.25-20 TT	14PR	TI400	6.5	20	992	235	800	3875
9.00-20 TT	14PR	TI400	7.0	23	1018	259	760	4385
10.00-20 TT	16PR	TI400	7.50	20	1055	278	690	4695

RG600A

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.50-16 TT	14PR	RG600A	6.00G	12	805	215	710	1300
7.50-16 TT	16PR	RG600A	6.00G	12	805	215	810	1400
8.25-16 TT	14PR	RG600A	6.50H	14	867	235	630	1700
8.25-16 TT	16PR	RG600A	6.50H	14	867	235	730	1800

工业轮胎 INDUSTRIAL TYRE

PLT328

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
4.50-12 TT	8PR	PLT328	3.00×12	13	548	122	900	730
5.50-15 TT	8PR	PLT328	4.50×12	11	670	157	720	1040
5.00-8 TT	10PR	PLT328	3.50D	11	470	137	700	1115
6.00-15 TT	10PR	PLT328	4.50E	15	705	170	825	2615
6.00-9 TT	10PR	PLT328	4.00E	14	540	160	860	1685
6.00-9 TT	12PR	PLT328	4.00E	14	540	160	1030	1875
6.50-10 TT	10PR	PLT328	5.00F	13	590	175	790	1915
6.50-10 TT	12PR	PLT328	5.00F	13	590	175	970	2150
7.00-12 TT	12PR	PLT328	5.00S	15	676	190	860	2520
7.00-12 TT	14PR	PLT328	5.00S	15	676	190	1000	2965
7.00-15 TT	12PR	PLT328	5.50F	16	750	200	860	3510
7.00-15 TT	14PR	PLT328	5.50F	16	750	200	945	3900
7.50-15 TT	12PR	PLT328	6.00G	16	780	215	800	3630
7.50-15 TT	14PR	PLT328	6.00G	16	780	215	915	4050
8.25-15 TT	12PR	PLT328	6.5	17	840	235	750	3950
8.25-15 TT	14PR	PLT328	6.5	17	840	235	800	4250
8.25-15 TT	16PR	PLT328	6.5	17	840	235	915	4750
15*41/2-8 TT	8PR	PLT328	3.25×8	7.5	385	122	1000	710
18*7-8 TT	14PR	PLT328	4.33R	12	465	173	900	1610
18*7-8 TT	16PR	PLT328	4.33R	12	465	173	1025	2160
21*8-9 TT	14PR	PLT328	6.00E	15	535	200	900	2210
21*8-9 TT	16PR	PLT328	6.00E	15	535	200	1000	2450
23*10-12 TT	12PR	PLT328	8	14	632	200	700	2980
23*9-10 TT	14PR	PLT328	6.50F	13	595	225	600	2200
23*9-10 TT	16PR	PLT328	6.50F	13	595	225	700	2425
23*9-10 TT	18PR	PLT328	6.50F	13	595	225	900	2905
23*9-10 TT	20PR	PLT328	6.50F	13	595	225	1000	3200
250-15 TT	16PR	PLT328	7.5	18.5	735	250	930	4285
250-15 TT	20PR	PLT328	7.5	18.5	735	250	1030	4580
27*10-12 TT	14PR	PLT328	8.00G	18	690	250	830	3530
28*9-15 TT	14PR	PLT328	7.0	17	690	250	970	3415
28*9-15 TT	16PR	PLT328	7.0	17	710	220	1030	3515
300-15 TT	20PR	PLT328	8.0	21	840	300	930	6575

PLT348

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
8.25-15 TT	16PR	PLT348	6.5	32	847	236	900	3845
10.00-20 TT	18PR	PLT348	7.5	43	1073	278	965	5355
12.00-20 TT	24PR	PLT348	8.5	45	1146	315	965	7820

P222

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.00-8 TT	10PR	P222	3.50D	10.5	470	137	700	1115
6.00-9 TT	12PR	P222	4.00E	13.5	540	160	1030	1875
6.50-10 TT	12PR	P222	5.00F	14	590	175	970	2150
7.00-12 TT	12PR	P222	5.00S	15	676	190	860	2520
7.00-12 TT	14PR	P222	5.00S	15	676	190	1000	2965
7.00-15 TT	14PR	P222	5.50F	15	750	200	945	3900
7.50-15 TT	14PR	P222	6.00G	15	780	215	915	4050
8.25-15 TT	14PR	P222	6.5	17	840	235	800	4250
12.00-20 TT	22PR	P222	8.5	22	1125	315	965	7820
18*7-8 TT	16PR	P222	4.33R	12	465	173	1025	2160
21*8-9 TT	14PR	P222	6.00E	15	535	200	900	2210
21*8-9 TT	16PR	P222	6.00E	15	535	200	1000	2450
23*9-10 TT	16PR	P222	6.50F	13	595	225	700	2425
23*9-10 TT	18PR	P222	6.50F	13	595	225	900	2905
250-15 TT	16PR	P222	7.5	17.5	735	250	930	4285
28*9-15 TT	14PR	P222	7.0	17	690	250	970	3415
300-15 TT	20PR	P222	8.0	20	840	300	930	6575

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
9.00-20 TT	14PR	PLT338	7.0	22	1018	259	750	5155
10.00-20 TT	16PR	PLT338	7.5	23	1055	278	775	6025
12.00-20 TT	16PR	PLT338	8.5	25	1125	315	700	6960
12.00-20 TT	18PR	PLT338	8.5	25	1125	315	800	7120
12.00-20 TT	20PR	PLT338	8.5	25	1125	315	880	7400

PLT338

工业轮胎 INDUSTRIAL TYRE

L-6

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.00-8 TT	10PR	L6	3.50D	10	470	137	800	1205
6.00-9 TT	10PR	L6	4.00E	10	540	160	755	1395
6.00-9 TT	12PR	L6	4.00E	10	540	160	900	1560
6.50-10 TT	10PR	L6	5.00F	13	590	175	790	1655
7.00-12 TT	12PR	L6	5.00S	14	676	190	700	2105
7.00-12 TT	14PR	L6	5.00S	14	676	190	850	2365
7.00-15 TT	12PR	L6	5.50F	13	750	200	825	2800
7.00-15 TT	14PR	L6	5.50F	13	750	200	1000	3000
7.00-9 TT	10PR	L6	5.00S	10	590	190	850	1990
7.00-9 TT	8PR	L6	5.00S	10	590	190	750	2150
7.50-15 TT	12PR	L6	6.00G	15	780	215	775	3040
7.50-15 TT	14PR	L6	6.00G	15	780	215	875	3270
8.25-12 TT	12PR	L6	6.5	13	765	235	750	3130
8.25-15 TT	12PR	L6	6.5	15	840	235	700	3430
8.25-15 TT	14PR	L6	6.5	15	840	235	800	3695
9.00-16 TT	14PR	L6	6.50H	15	890	255	760	4495
18*7-8 TT	16PR	L6	4.33R	11	465	173	1000	1965
28*9-15 TT	14PR	L6	7.0	12	710	220	800	2725

SD3000

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.00-9 TT	10PR	SD3000	4.00E	12	540	160	850	1505
6.50-10 TT	10PR	SD3000	5.00F	14	590	175	700	1540
7.00-12 TT	12PR	SD3000	5.00S	14	676	190	850	2375
7.00-15 TT	12PR	SD3000	5.50F	14	750	200	825	2800
7.00-15 TT	14PR	SD3000	5.50F	14	750	200	900	2950
7.00-9 TT	10PR	SD3000	5.00S	12	590	190	850	1995
7.00-9 TT	8PR	SD3000	5.00S	12	590	190	750	1850
8.25-12 TT	12PR	SD3000	6.5	13	765	235	750	3100
8.25-15 TT	14PR	SD3000	6.5	16	840	235	800	3695
28*9-15 TT	14PR	SD3000	7.0	17	710	220	800	2725
28*9-15 TT	16PR	SD3000	7.0	17	710	220	900	2925

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.00-8 TT	10PR	SD2000	3.50D	11.5	470	137	700	1115
6.00-9 TT	10PR	SD2000	4.00E	13.5	540	160	860	1685
6.50-10 TT	10PR	SD2000	5.00E	14	590	175	790	1915
7.00-12 TT	12PR	SD2000	5.00S	14	676	190	860	2520
7.00-12 TT	14PR	SD2000	5.00S	14	676	190	1000	2965
7.00-15 TT	12PR	SD2000	5.50F	16	750	200	860	3510
7.00-15 TT	14PR	SD2000	5.50F	16	750	200	945	3900
7.50-15 TT	12PR	SD2000	6.00G	18	780	215	800	3630
7.50-15 TT	14PR	SD2000	6.00G	18	780	215	915	4050
7.50-16 TT	12PR	SD2000	6.00G	17	805	215	775	3790
8.25-15 TT	12PR	SD2000	6.5	17	840	235	750	3950
8.25-15 TT	14PR	SD2000	6.5	17	840	235	800	4250
18*7-8 TT	16PR	SD2000	4.33R	15	465	173	1025	2160
21*8-9 TT	14PR	SD2000	6.00E	20	535	200	1000	2450
23*10-12 TT	12PR	SD2000	8.0	18	632	200	700	2980
23*9-10 TT	16PR	SD2000	6.50F	18	595	225	700	2425
23*9-10 TT	18PR	SD2000	6.50F	18	595	225	900	2905
250-15 TT	16PR	SD2000	7.5	18.5	735	250	930	4285
250-15 TT	20PR	SD2000	7.5	18.5	735	250	1030	4580
27*10-12 TT	14PR	SD2000	8.00G	17	690	250	830	3530
28*9-15 TT	14PR	SD2000	7.0	17	710	220	970	3415
300-15 TT	20PR	SD2000	8.0	21	840	300	930	6575

SD2000

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.00-8 TT	10PR	T800	3.50D	13	470	137	1000	1090
6.00-9 TT	12PR	T800	4.00E	13	540	160	1000	1450
6.50-10 TT	10PR	T800	5.00F	15	590	175	780	1500
7.00-12 TT	14PR	T800	5.00S	15	676	190	900	2120
7.00-15 TT	14PR	T800	5.50F	17	750	200	920	2545
7.50-15 TT	12PR	T800	6.00G	17	780	215	825	2650
7.50-15 TT	14PR	T800	6.00G	17	780	215	925	2800
8.25-15 TT	14PR	T800	6.5	17	840	235	800	3250
18*7-8 TT	16PR	T800	4.33R	15.5	465	173	1000	1650
21*8-9 TT	14PR	T800	6.00E	14	535	200	910	1950
23*9-10 TT	20PR	T800	6.50F	18	595	225	1000	2650
250-15 TT	20PR	T800	7.5	18.5	735	250	1030	3875
27*10-12 TT	14PR	T800	8.00G	19	690	250	700	2725
28*9-15 TT	14PR	T800	7.0	17	710	220	1000	3000
300-15 TT	20PR	T800	8.0	22.5	840	300	940	5000

T800

M12

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.00-9 TT	10PR	M12	5.50F	10	590	190	860	1995

AGRICULTURAL TIRE
农业轮胎

农业轮胎 AGRICULTURAL TYRE

格规 SIZE	层级 PR	花纹代码 PRETERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.00-12 TT	6PR	R-1 14对花	4.50E	22	640	165	250	405
6.00-12 TT	6PR	R-1 16对花	4.50E	22	640	165	250	405
6.00-16 TT	6PR	R-1	4.50E	24	745	165	250	495
6.50-16 TT	6PR	R-1	5.00F	25	765	180	250	565
7.50-16 TT	6PR	R-1	5.50F	25	810	205	210	650
7.50-20 TT	6PR	R-1	5.50F	26	910	205	210	760
8.3-20 TT	6PR	R-1	W7	26	895	210	240	695
8.3-20 TT	6PR	R-1(耐刺扎)	W7	26	895	210	240	695
8.3-24 TT	6PR	R1	W7	26	995	210	240	810
8.3-24 TT	6PR	R-1(耐刺扎)	W7	26	995	210	240	810
9.5-16 TT	6PR	R-1	W8	23	860	240	210	800
9.5-20 TT	6PR	R-1	W8	33	950	240	210	810
9.5-24 TT	6PR	R-1	W8	30	1050	240	210	940
9.5-24 TT	8PR	R-1	W8	30	1050	240	280	1110
10.00-15 TT	8PR	R-1	8LB	19	889	276	240	1450
10/75-15.3 TL	10PR	R-1	9.0	22	760	264	390	1090
11.2-24 TT	6PR	R-1	W10	35	1105	285	180	1045
11.2-24 TT	8PR	R-1	W10	35	1105	285	240	1225
11.2-28 TT	6PR	R-1	W10	34	1205	285	180	1115
11.2-28 TT	8PR	R-1	W10	34	1205	285	240	1305
11.2-28 TT	8PR	R-1(耐刺扎)	W10	34	1205	285	240	1305
11.5/80-15.3 TL	10PR	R-1	9.0	24	845	290	340	1360
11-32 TT	6PR	R-1	W10	44	1360	305	140	1000
11-38 TT	8PR	R-1	W10	46.5	1540	305	180	1630
12.4-24 TT	6PR	R-1	W11	36	1160	315	170	1200
12.4-24 TT	6PR	R-1(耐刺扎)	W11	36	1160	315	170	1200
12.4-24 TT	8PR	R-1	W11	36	1160	315	230	1415
12.4-28 TT	6PR	R-1	W11	36	1260	315	170	1275
12.4-28 TT	8PR	R-1	W11	36	1260	315	230	1510
12.4-32 TT	6PR	R-1	W11	36	1360	315	170	1355
12-38 TT	10PR	R-1	DW11	35	1575	330	220	1800
12-38 TT	8PR	R-1	DW11	35	1575	330	140	1570
13.6/12-38 TT	10PR	R-1	W12	35	1565	345	250	2215
13.6-24 TT	8PR	R-1	W12	37	1210	345	210	1545
13.6-24 TT	8PR	R-1(耐刺扎)	W12	37	1210	345	210	1545
13.6-28 TT	8PR	R-1	W12	33	1310	345	210	1645
13.6-28 TT	10PR	R-1	W12	33	1310	345	250	1910
13.6-38 TT	10PR	R-1	W12	36	1565	345	250	2215
14.9-24 TT	10PR	R-1	W13	39	1265	378	230	1990

农业轮胎 AGRICULTURAL TYRE

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
14.9-24 TT	6PR	R-1	W13	39	1265	378	140	1510
14.9-24 TT	8PR	R-1	W13	39	1265	378	180	1760
14.9-24 TT	8PR	R-1(耐刺扎)	W13	39	1265	378	180	1760
14.9-24 TL	4PR	R-1(TERRA)	W13	39	1265	378	100	1210
14.9-26 TT	8PR	R-1	W13	38	1315	378	180	1820
14.9-26 TT	8PR	R-1(耐刺扎)	W13	38	1315	378	180	1820
14.9-26 TT	10PR	R-1	W13	38	1315	378	230	2055
14.9-30 TT	10PR	R-1	W13	38	1415	378	230	2190
14.9-30 TT	8PR	R-1	W13	38	1415	378	180	1940
15.5/80-24 TL	12PR	R-1	W13	35	1240	394	300	2900
15.5/80-24 TL	16PR	R-1	W13	35	1240	394	400	3300
15.5-38 TT	10PR	R-1	W14L	36	1570	395	230	2320
15-24 TT	10PR	R-1	DW14	35	1330	410	280	2800
15-24 TT	10PR	R-1(耐刺扎)	DW14	35	1330	410	280	2800
15-24 TT	12PR	R-1	DW14	35	1330	410	330	3100
16.9-28 TT	10PR	R-1	W15L	39	1435	430	200	2380
16.9-28 TT	10PR	R-1(耐刺扎)	W15L	39	1435	430	200	2380
16.9-28 TT	8PR	R-1	W15L	39	1435	430	170	2175
16.9-30 TT	10PR	R-1	W15L	40	1485	430	200	2455
16.9-30 TT	8PR	R-1	W15L	40	1485	430	170	2245
16.9-34 TT	10PR	R-1	W15L	39	1585	430	200	2650
16.9-34 TT	8PR	R-1	W15L	39	1585	430	170	2380
16.9-38 TT	10PR	R-1	W15L	39	1685	430	200	2760
16.9-38 TT	8PR	R-1	W15L	39	1685	430	170	2520
18.4-26 TT	12PR	R-1	DW16	38	1450	467	230	2985
18.4-26 TT	8PR	R-1	DW16	38	1450	467	140	2265
18.4-26 TT	8PR	R-1(耐刺扎)	DW16	38	1450	467	140	2265
18.4-26 TL	12PR	R-1	DW16	38	1450	467	230	2985
18.4-30 TT	10PR	R-1	W16L	41	1550	467	180	2815
18.4-30 TT	8PR	R-1	W16L	41	1550	467	140	2415
18.4-34 TT	10PR	R-1	W16L	38	1655	467	180	2990
18.4-34 TT	8PR	R-1	W16L	38	1655	467	140	2565
18.4-38 TT	10PR	R-1	W16L	41	1755	467	180	3165
18.4-38 TT	10PR	R-1(耐刺扎)	W16L	41	1755	467	180	3165
18.4-38 TT	8PR	R-1	W16L	41	1755	467	140	2715
18.4-42 TT	10PR	R-1	W16A	51	1857	467	180	3330
18.4-42 TT	10PR	R-1(耐刺扎)	W16A	51	1857	467	180	3330
18.4-42 TT	12PR	R-1	W16A	51	1857	467	210	3750
20.8-38 TT	10PR	R-1	W18L	42	1835	528	160	3475
23.1-26 TT	12PR	R-1	DW20	42	1605	587	170	3610
405/70-20 TL	14PR	R-1	13.0	37	1075	410	430	5150
16/70-20 TT/TL	10PR	R-1	13.0	35	1075	410	325	4250

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
12.4-24 TT	8PR	R2	W11	67	1192	315	230	1415
13.6-38 TT	8PR	R2	W12	70	1600	345	210	1910
18.4-34 TT	10PR	R2	W16L	78	1702	467	180	2990
19.5L-24 TT	10PR	R2	DW16	81	1357	495	170	1925
19.5L-24 TT	12PR	R2	DW16	81	1357	495	210	2415
23.1-26 TT	10PR	R2	DW20	88	1662	587	140	3245
23.1-26 TT	12PR	R2	DW20	88	1662	587	170	3610

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
16.9-24 TL	12PR	R4	W15L	27	1310	430	260	3250
16.9-28 TL	12PR	R4	W15L	26	1410	430	200	2380
17.5L-24 TL	10PR	R4	W15L	26	1240	445	220	2800
19.5L-24 TL	12PR	R4	DW17	28	1315	495	230	3450
21L-24 TL	14PR	R4	DW18	32	1375	533	250	4200

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
14.9-28 TT	8PR	R7	W13	38	1365	378	180	1880
14.9-28 TT	8PR	R7（耐刺扎）	W13	38	1365	378	180	1880
14.9-28 TT	10PR	R7	W13	38	1365	378	230	2120
14.9-28 TT	12PR	R7	W13	38	1365	378	280	2300
14.9-30 TT	8PR	R7	W13	38	1415	378	180	1940

农业轮胎 AGRICULTURAL TYRE

KR-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
18.4/15-30 TT	12PR	KR-1	W16L	41	1550	467	230	3180

SR-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
13.6/12-38	10PR	SR-1	W12	33	1565	345	250	2215

WR-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
11.2-24 TT	4PR	WR-1	W10	34	1105	285	130	750
11.2-24 TT	6PR	WR-1	W10	34	1105	285	180	950
11.2-28 TT	4PR	WR-1	W10	30	1205	285	130	800
11.2-28 TT	6PR	WR-1	W10	30	1205	285	180	1000
11.2-38 TL	4PR	WR-1	W10	28.5	1459	285	120	950
11.2-38 TT	6PR	WR-1	W10	28.5	1459	285	180	1150
12-38 TT	8PR	WR-1	DW11	35	1575	330	140	1570
12.4-24 TT	8PR	WR-1	W11	34	1159	315	220	1285
12.4-28 TT	4PR	WR-1	W11	34	1260	315	110	900
12.4-28 TT	6PR	WR-1	W11	34	1260	315	170	1150
13.6-28 TT	6PR	WR-1	W12	34	1311	345	150	1285
13.6-28 TT	8PR	WR-1	W12	33	1311	345	190	1500
13.6-38 TT	6PR	WR-1	W12	34	1565	345	150	1500
13.6-38 TT	8PR	WR-1	W12	34	1565	345	190	1790
14.9-24 TT	4PR	WR-1	W13	35	1265	378	100	1210
14.9-24 TT	6PR	WR-1	W13	35	1265	378	140	1360
14.9-24 TT	8PR	WR-1	W13	35	1265	378	180	1600
14.9-28 TT	6PR	WR-1	W13	35	1367	378	140	1450
15.5-38 TT	8PR	WR-1	W14L	36	1569	395	180	1850
15.5-38 TT	10PR	WR-1	W14L	36	1570	395	230	2320
16.9-24 TT	6PR	WR-1	W15L	39	1333	430	120	1550
16.9-30 TT	8PR	WR-1	W15L	38	1485	430	170	2000
16.9-38 TT	8PR	WR-1	W15L	36	1685	430	170	2520
18.4-30 TT	8PR	WR-1	W16L	39	1550	467	140	2180
18.4-30 TT	10PR	WR-1	W16L	39	1550	467	180	2815
18.4-34 TT	8PR	WR-1	W16L	41	1655	467	140	2300
18.4-34 TT	10PR	WR-1	W16L	38	1655	467	180	2990
18.4-38 TT	8PR	WR-1	W16L	38	1755	467	140	2430
18.4-38 TT	10PR	WR-1	W16L	38	1755	467	180	3165
20.8-38 TT	8PR	WR-1	18.00	51	1834	528	120	2800

KR-4

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
16.9-28 TT	12PR	KR-4	W15L	26	1435	430	230	2725

G-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5-12 TL	6PR	G-1	3.00D	13	590	145	360	285
6-14 TL	6PR	G-1	5.00	15	690	165	250	450
7-14 TL	6PR	G-1	5.00	16	690	183	250	450
6-16 TL	6PR	G-1	4.50E	25	745	165	250	495
7-16 TL	6PR	G-1	6.00	27	744	183	250	500
8-16 TL	6PR	G-1	6.00	17	790	211	195	617
9.5-16 TL	6PR	G-1	8.00	18	845	241	210	630

PR-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.50-16 TT	6PR	PR-1	5.00F	65	830	165	250	565
7.50-16 TT	6PR	PR-1	5.50F	73	910	205	300	750
7.50-16(小轮廓) TT	6PR	PR-1	5.50F	73	810	200	210	880
8.3-20 TT	6PR	PR-1	W7	78	950	210	270	970
8.3-24 TT	6PR	PR-1	W7	78	1050	210	270	1135
9.00-20 TT	6PR	PR-1	W8	78	1034	228	210	750
9.5-20 TT	6PR	PR-1	W8	70	1050	240	240	1140
9.5-24 TT	6PR	PR-1	W8	78	1150	240	240	1315
9.5-24 TT	8PR	PR-1	W8	78	1150	240	310	1420
11.2-24 TT	6PR	PR-1	W10	85	1205	285	210	1465
11-32 TT	6PR	PR-1	W10	94	1460	305	160	1080
12.4/11-28 TT	6PR	PR-1	W11	84	1315	315	200	1785
12.4/11-28 TT	8PR	PR-1	W11	84	1315	315	220	1900
12.4-24 TT	8PR	PR-1	W11	85	1215	315	260	1980
13.6-38 TT	10PR	PR-1	W12	90	1710	345	250	2780
14.9-30 TT	10PR	PR-1	W13	100	1560	378	230	2190
14.9-30 TT	8PR	PR-1	W13	100	1560	378	180	1940
16.9-30 TT	8PR	PR-1	W15L	90	1585	430	170	2245
16.9-30 TT	10PR	PR-1	W15L	90	1585	430	200	2455
16.9-34 TT	10PR	PR-1	W15L	90	1687	430	220	3385

农业轮胎 AGRICULTURAL TYRE

F-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.00-16 TT	6PR	F-1	4.00E	14	740	160	340	560
6.00-16 TT	6PR	F-1(耐刺扎)	4.00E	14	740	160	340	560
6.50-20 TT	6PR	F-1	5.00F	14	860	180	310	725
6.50-20 TT	8PR	F-1	5.00F	14	860	180	420	865
6.50-20 TT	6PR	F-1（耐刺扎）	5.00F	14	860	180	310	725
7.50-16 TT	8PR	F-1	5.50F	19	810	205	370	870
7.50-16 TT	6PR	F-1	5.50F	19	810	205	280	745
7.50-18 TT	8PR	F-1	5.50F	20	860	205	370	945
7.50-20 TT	8PR	F-1	5.50F	19	910	205	370	1020
7.50-20 TT	6PR	F-1	5.50F	19	910	205	280	875
11.00-16 TT	8PR	F-1	W10L	28	970	315	250	1320

F-2

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.50-16 TT	6PR	F-2	4.00E	13	710	150	370	525
6.00-16 TT	6PR	F-2	4.00E	14	740	160	340	560
6.50-16 TT	6PR	F-2	450E	14	760	175	310	615
7.50-16 TT	6PR	F-2	5.50F	18	810	205	280	745
10.00-15 TT	8PR	F-2	8LB	9	889	276	240	1425

I-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
9.5L-14 TT	8PR	I-1	8.00	6	737	239	300	1090
9.5L-14 TL	8PR	I-1	8.00	6	737	239	300	1090
9.5L-15 TL	8PR	I-1	8LB	6	765	240	280	1100
9.5L-15 TT	8PR	I-1	8LB	6	765	240	280	1100
11L-14 TT	6PR	I-1	8KB	6	752	280	170	925
11L-15 TL	8PR	I-1	W8L	6	775	280	220	1130
11L-15 TL	12PR	I-1	W8L	6	775	280	360	1450
11L-15 TT	8PR	I-1	W8L	6	775	280	220	1130
12.5L-15 TT	10PR	I-1	10.00	6	825	317	300	1550
12.5L-15 TL	12PR	I-1	10.00	6	825	317	330	1800
12.5L-15 TT	12PR	I-1	10.00	6	825	317	330	1800

F-2(4RIB)

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10.00-16 TT	8PR	F-2(4RIB)	W8L	16	894	274	300	1060
10.00-16 TL	10PR	F-2(4RIB)	W8L	16	910	275	390	1280
10.00-16 TT	10PR	F-2(4RIB)	W8L	16	910	275	390	1280
11.00-16 TT	8PR	F-2(4RIB)	W10L	16	967	315	280	1180
11.00-16 TL	10PR	F-2(4RIB)	W10L	16	970	315	345	1350
11.00-16 TL	12PR	F-2(4RIB)	W10L	16	970	315	410	1550
11L-15 TT	8PR	F-2(4RIB)	8.00	21	815.3	274.3	300	950

F-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
11L-15 TL	10PR	F-3	8LB	11	810	280	360	1060
11L-16 TL	12PR	F-3	8LB	11	835	280	440	1250
11L-16 TL	10PR	F-3	8LB	11	835	280	360	1120
14.5/75-16.1 TL	10PR	F-3	11LB	15	920	375	280	1450

F-2(3RIB)

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
4.00-15 TL	4PR	F-2(3RIB)	3.00D	9	610	110	360	265
4.00-15 TT	4PR	F-2(3RIB)	3.00D	11.5	620	114	360	265
4.00-19 TL	4PR	F-2(3RIB)	3.00D	10	720	110	360	325
5.00-15 TL	4PR	F-2(3RIB)	4J	13	665	140	360	365
5.50-16 TL	6PR	F-2(3RIB)	4.00	13	710	150	390	475
5.50-16 TT	6PR	F-2(3RIB)	4.00	13	710	150	390	475
6.00-16 TL	6PR	F-2(3RIB)	4.00	10	740	160	360	515
6.00-16 TT	6PR	F-2(3RIB)	4.00	10	740	160	360	515
6.50-16 TL	6PR	F-2(3RIB)	4.50	14	760	175	330	560
6.50-16 TT	6PR	F-2(3RIB)	4.50	14	760	175	330	560
7.50-16 TL	10PR	F-2(3RIB)	5.50	19	810	205	390	775
7.50-16 TL	6PR	F-2(3RIB)	5.50	19	810	205	300	670
7.50-16 TL	8PR	F-2(3RIB)	5.50	19	810	205	390	775
7.50-16 TT	10PR	F-2(3RIB)	5.50	19	810	205	430	860
7.50-16 TT	8PR	F-2(3RIB)	5.50	19	810	205	390	775
10.00-16 TL	10PR	F-2(3RIB)	W8L	23	910	275	390	1280
10.00-16 TT	10PR	F-2(3RIB)	W8L	23	910	275	390	1280
11.00-16 TL	10PR	F-2(3RIB)	W10L	23	970	315	345	1350
11.00-16 TT	10PR	F-2(3RIB)	W10L	23	970	315	345	1350
11.00-16 TT	12PR	F-2(3RIB)	W10L	23	970	315	410	1550
7.5L-15 TT	6PR	F-2(3RIB)	6.00	15.5	741.7	203.2	300	650
9.5L-15 TT	8PR	F-2(3RIB)	7.00	24	777.2	238.8	330	850
11L-15 TT	8PR	F-2(3RIB)	8.00	21	815.3	274.3	300	950

农业轮胎 AGRICULTURAL TYRE

IMP100

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10/75-15.3 TL	10PR	IMP100	9.0	9	780	264	390	1525
10/75-15.3 TL	12PR	IMP100	9.0	9	780	264	460	1700
10/75-15.3 TL	14PR	IMP100	9.0	9	780	264	510	1850
11.5/80-15.3 TL	10PR	IMP100	9.0	10	865	290	340	1930
11.5/80-15.3 TL	12PR	IMP100	9.0	10	865	290	410	2145
11.5/80-15.3 TL	14PR	IMP100	9.0	10	865	290	480	2350
12.5/80-15.3 TL	14PR	IMP100	9.0	10	875	307	510	2810

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
10.5/80-18 TL	10PR	IMP600	9	22	905	274	370	1935
10.5/80-18 TL	12PR	IMP600	9	22	905	274	430	2075
12.5/80-18 TL	12PR	IMP600	9	25.5	985	308	370	2625
12.5/80-18 TL	14PR	IMP600	9	25.5	985	308	430	2910

IMP600

M-8

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
12.00-18 TT	10PR	M-8	9.00V	32	1085	325	330	1800
12.00-18 TT	12PR	M-8	9.00V	32	1085	325	420	2300

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.50-16 TT	6PR	M-9	5.00F	8	785	205	225	870
11.2-20 TT	10PR	M-9	W10	12	1005	285	300	1250
11.2-20 TT	4PR	M-9	W10	12	1005	285	130	760
12.4-24 TT	6PR	M-9	W10	12	1105	315	170	1200
13-20 TT	4PR	M-9	W12	10	1090	380	120	1050
31*9.5-16 TT	4PR	M-9	6.00F	8	790	220	160	850

M-9

EMR-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
405/70-20 TL	14PR	EMR1	13.00	28	1075	410	430	5150
405/70-24 TL	14PR	EMR1	13.00	28	1175	410	450	5600

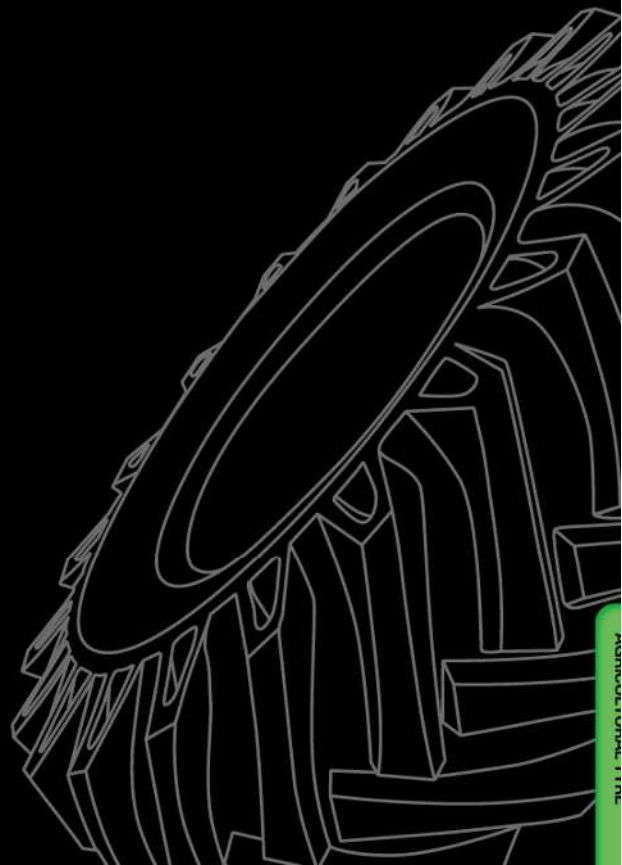

SOLID TYRE
实心轮胎

充气式实心轮胎 SOLID TYRE FOR PNEUMATIC TYRE RIMS

格规 SIZE	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	单胎负荷 MAX LOADING KG
4.00-8	SP800	3.00D	22	423	121	1090
5.00-8	SP800	3.00D	25	469	146	1255
6.00-9	SP800	4.00E	26	545	160	1975
6.50-10	SP800	5.00F	30	597	178	2715
7.00-12	SP800	5.00S	26	683	192	3105
7.00-15	SP800	5.50S	31	759	204	3700
7.00-9	SP800	5.00S	30	578	186	2670
7.50-15	SP800	6.50H	35	774	215	4490
8.25-12	SP800	5.00	33	735	236	4325
8.25-15	SP800	6.5	36	847	236	5085
8.25-15	SP800	5.5	36	847	236	4305
18*7-8	SP800	4.33R	21	457	170	2430
21*8-9	SP800	6.00E	25	535	207	2890
23*9-10	SP800	6.50F	26	595	225	3730
250-15	SP800	7.0	34	735	250	5220
250-15	SP800	7.5	34	735	250	5595
28*9-15	SP800	7.0	32	706	221	4060

TRUCK TIRE
载重轮胎

载重轮胎 TRUCK TIRE

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
4.00-8TT	8PR	B1	3.00D	8	425	110	380	260
4.00-12TT	8PR	B1	3.00D	8	535	110	420	420
5.00-14TT	10PR	B1	4J	9	615	140	500	605
6.00-13TT	8PR	B1	4.50B	9	655	170	420	650
6.00-14TT	8PR	B1	4 1/2J	9	680	170	420	690
6.00-15TT	8PR	B1	4.50E	9	705	170	420	730
6.00-16TT	10PR	B1	4.50E	9	730	170	530	850
6.50-14TT	8PR	B1	4 1/2J	10	705	180	420	775
6.50-15TT	8PR	B1	4.50E	10	730	180	420	825
6.50-16TT	10PR	B1	5.50F	10	750	185	530	975
6.50-16TT	12PR	B1	5.50F	10	750	185	630	1060
6.50-16TT	14PR	B1	5.50F	10	750	185	730	1150
6.50-16TT	8PR	B1	5.50F	10	750	185	420	850
7.00-15TT	10PR	B1	5.50F	11	750	200	530	1030
7.00-15TT	14PR	B1	5.50F	11	750	200	730	1250
7.00-16TT	10PR	B1	5.50F	11	775	200	530	1090
7.00-16TT	12PR	B1	5.50F	11	775	200	630	1215
7.00-16TT	14PR	B1	5.50F	11	775	200	730	1320
7.00-16TT	16PR	B1	5.50F	11	775	200	830	1430
7.00-20TT	10PR	B1	5.5	13	904	200	630	1450
7.00-20TT	14PR	B1	5.5	13	904	200	840	1750
7.50-16TT	12PR	B1	6.00G	12	805	215	630	1400
7.50-16TT	14PR	B1	6.00G	12	805	215	730	1500
7.50-16TT	16PR	B1	6.00G	12	805	215	830	1600
7.50-20TT	14PR	B1	6.0	15	935	215	810	1900
8.25-20TT	14PR	B1	6.5	14	974	236	810	2240

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.50-16 TT	12PR	B2	5.50F	10	750	185	630	1060
6.50-16 TT	14PR	B2	5.50F	10	750	185	730	1150
7.00-16 TT	14PR	B2	5.50F	11	775	200	730	1320
7.00-16 TT	16PR	B2	5.50F	11	775	200	830	1450
7.50-16 TT	14PR	B2	6.00G	12	805	215	730	1500
7.50-16 TT	16PR	B2	6.00G	12	805	215	830	1600
8.25-16 TT	14PR	B2	6.50H	14	855	235	630	1700
8.25-16 TT	16PR	B2	6.50H	14	855	235	730	1800
9.00-16 TT	6PR	B2	6.50H	14	890	255	280	1215
9.00-20 TT	14PR	B2	7.0	14.5	1018	259	770	2575
9.00-20 TT	16PR	B2	7.0	14.5	1018	259	880	2900
10.00-20 TT	16RP	B2	7.5	14.5	1055	278	810	3000
10.00-20 TT	20RP	B2	7.5	14.5	1055	278	1000	3570
11.00-20 TT	16PR	B2	8.0	14.5	1085	293	810	3350
11.00-20 TT	18PR	B2	8.0	14.5	1085	293	910	3650
12.00-20 TT	18PR	B2	8.5	16	1125	315	810	3750
12.00-20 TT	20PR	B2	8.5	16	1125	315	880	4000

载重轮胎 TRUCK TIRE

B-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
8.25-16 TT	14PR	B3	6.50H	14	855	235	630	1700
8.25-16 TT	16PR	B3	6.50H	14	855	235	730	1800

B-5

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
11.00-20 TT	18PR	B5	8.0	20	1085	293	910	3650

T-2

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
4.50-12 TT	8PR	T2	3.00B	8	545	127	400	412
5.00-12 TT	8PR	T2	3.50B	9	568	143	400	487
6.00-13 TT	8PR	T2	4.50B	10	655	170	420	650
6.00-14 TT	8PR	T2	4 1/2J	10	680	170	420	690
6.00-15 TT	8PR	T2	4.50E	10	705	170	420	730
6.00-15 TT	10PR	T2	4.50E	10	705	170	530	825
6.50-14 TT	8PR	T2	41/2J	11	705	180	420	775
6.50-15 TT	10PR	T2	4.50E	11	730	180	530	950
6.50-15 TT	8PR	T2	4.50E	10	730	180	420	825
6.50-16 TT	10PR	T2	5.50F	10	750	185	530	975
6.50-16 TT	12PR	T2	5.50F	10	750	185	630	1060
6.50-16 TT	14PR	T2	5.50F	10	750	185	730	1180
6.50-16 TT	8PR	T2	5.50F	10	750	185	420	850
7.00-16 TT	10PR	T2	5.50F	11	775	200	530	1090
7.00-16 TT	12PR	T2	5.50F	11	775	200	630	1215
7.00-16 TT	14PR	T2	5.50F	11	775	200	730	1320
7.00-16 TT	16PR	T2	5.50F	11	775	200	830	1430
7.50-16 TT	10PR	T2	6.00G	11	805	215	530	1250
7.50-16 TT	14PR	T2	6.00G	11	805	215	730	1500
7.50-20 TT	14PR	T2	6.0	12.5	935	215	810	1900
8.25-16 TT	14PR	T2	6.50H	13	855	235	630	1700
8.25-16 TT	16PR	T2	6.50H	13	855	235	730	1800
8.25-20 TT	14PR	T2	6.5	12	974	236	810	2240
9.00-20 TT	16PR	T2	7.0	14.5	1018	259	880	2900
10.00-20 TT	16RP	T2	7.5	14	1055	278	810	3000
10.00-20 TT	20RP	T2	7.5	14	1055	278	1000	3570

T-4

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.50-15 TT	10PR	T4	4.50E	10.5	730	180	530	950
7.00-15 TT	14PR	T4	5.50F	11.5	750	200	730	1250
7.50-15 TT	12PR	T4	6.00G	11.5	780	215	630	1360

M-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
5.00-16TT	10PR	M3	4.00E	9	710	150	550	700
5.50-13TT	8PR	M3	4J	9	620	160	420	565
5.50-16TT	10PR	M3	4.50E	9	695	160	530	750
7.50-16TT	14PR	M3	6.00G	10	805	215	730	1500
7.50-16TT	16PR	M3	6.00G	10	805	215	830	1650

M-4

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
6.00-14 TT	8PR	M4	4.50J	10	680	170	420	690
6.50-14 TT	8PR	M4	4.50J	11	705	180	420	775
6.50-15 TT	10PR	M4	4.50E	11	730	180	530	950
6.50-16 TT	8PR	M4	5.50F	12	750	185	420	850

M-5

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.00-15 TT	10PR	M5	5.50F	14	750	200	530	1030
7.00-15 TT	12PR	M5	5.50F	14	750	200	630	1150
7.00-15 TT	8PR	M5	5.50F	14	750	200	420	900
7.00-16 TT	10PR	M5	5.50F	15	775	200	530	1090
7.00-16 TT	12PR	M5	5.50F	15	775	200	630	1215
7.00-16 TT	8PR	M5	5.50F	15	775	200	420	975
7.50-16 TT	14PR	M5	6.00G	17	805	215	730	1500
7.50-16 TT	8PR	M5	6.00G	17	805	215	420	1120

T-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.00-16 TT	10PR	T1	5.50F	12	775	200	530	1090
7.00-16 TT	12PR	T1	5.50F	12	775	200	630	1215
7.50-16 TT	12PR	T1	6.00G	12	805	215	630	1400

载重轮胎 TRUCK TIRE

M-7

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
7.50-16 TT	8PR	M7	6.00G	17	805	215	420	1120
7.50-16 TT	10PR	M7	6.00G	17	805	215	530	1250

R-3

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
8.5-16 TT	10PR	R-3	6.50H	17	845	235	320	1095
8.5-16 TT	12PR	R-3	6.50H	17	845	235	350	1150
8.5-16 TT	14PR	R-3	6.50H	17	845	235	530	1475

HW100

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
14.00-24 TT	24PR	HW100	10.0	25.5	1370	375	630	4580

Y-1

格规 SIZE	层级 PR	花纹代码 PATTERN NUMBER	标准轮辋 STANDARD RIM	花纹深度 TREAD DEPTH MM	外直径 OVERALL DIAMETER MM	断面宽 SECTION WIDTH MM	标准气压 RELEVANT PRESSURE KPA	单胎负荷 MAX LOADING KG
1500*600-635 TT	22PR	Y-1	600*635	32	1500	600	380	5750
15.5-20 TT	22PR	Y-1	12.00	18	1260	420	700	6500

WWW.XLXJ.CN

详情请登录

WWW.XLXJ.CN